宁波威尔美德电器有限公司
NINGBO WELL MADE ELECTRICAL CO.,LTD
Add: A2 1208LiYuanShangDu Building Huancheng West Road Ningbo Zhejiang.China.
Tel: 86-574-87103265 86-574-87162195
Fax: 86-574-87103266
E-mail: wellmade@wellmade.asia
www.nb-wellmade.en.alibaba.com
www.wellmade.asia

ENERGY. LED LIGHT
Product Catalogue



宁波威尔美德电器有限公司
NINGBO WELL MADE ELECTRICAL CO.,LTD

ABOUT US

Ningbo Well Made Electrical Co.,Ltd is a company specializing in manufacturing lighting, optoelectronics, such as led bulb, led spot light,led flood light, led panel light,led tube,led strip light, downlight fixture, etc.

The enterprises located in Ningbo city which belongs to the stronger economic circle besides Changjiang river, transportation is pretty convenient, maritime transport is 30 mins away from Ningbo port which owns famous reputation of the "Far East Rotterdam,air transport is 15 minutes by car.

Since the foundation of enterprises, keep participating in market competition via high starting point,scientific management methods, a solid financial strength and technological forces are the three main belief continue to expand production scale ,improve product quality and expand domestic and foreign markets. Products are exported to the United States, Europe, Middle East and other international markets, so ,we have accumulated 10 years exporting experience of handling different markets and products , Which is also a way to deal with OEM orders. In order to adapt to the continueous changes of market demands, our R & D departments develop more and more needed products according to demand of the market and customers, such as universal adapter, cables and wires, etc.

Warmly welcomed to visiting our factory. We will uphold "trustworthy, inspirational, dedicated" concept, constantly striving for perfection, strengthen the building of enterprise culture, reinforce the foundation of technology and management foundation, dedicated to friends domestic and abroad to provide affordable, full range, first-class quality electrical products and full-scale service, seeking win-win among customers, suppliers, business and employees, also striving for a better future!



CONTECT

FLOOD LIGHT.....01-05
PANEL LIGHT.....06-12
LED STRIP LIGHT.....13-17
TRI-PROOF LIGHT.....18-20
LED BULB.....21-29
SPOT LIGHT.....30-38
R7S LIGHT.....39-40
NAIL LAMP.....41
LED LASER LIGHT.....42-48
DOWNLIGHT FIXTURE.....49-52

FLOODLIGHT



WM-FLIP

Voltage	85-265V/AV
Material	Aluminum
Led Type	BRIDGELUX/EPISTAR
Beam	120°
CCT	2700K-7000K
Ra	80
Pf	>0.5
IP	65

10W Lumen 800-900LM

20W Lumen 1600-1700LM

30W Lumen 2400-2500LM

50W Lumen 4500-4600LM



WM-FL-01

Voltage	85-265VAC
Material	Aluminum
Led Type	2835/5730
Beam	120°
CCT	2700K-7000K
Ra	80
Pf	>0.5
IP	65

10W Lumen 900-1000LM

20W Lumen 1800-2000LM

30W Lumen 2700-3000LM

200W Lumen 18000-20000LM

50W Lumen 4500-5000LM

100W Lumen 9000-10000LM

150W Lumen 13000-15000LM



WM-FL-02

Voltage	85-265VAC
Material	Aluminum
Led Type	2835/5730
Beam	120°
CCT	2700K-7000K
Ra	80
Pf	>0.5
IP	65

10W Lumen 900-1000LM

20W Lumen 1800-2000LM

30W Lumen 2700-3000LM

200W Lumen 18000-20000LM

50W Lumen 4500-5000LM

100W Lumen 9000-10000LM

150W Lumen 13000-15000LM



WM-FL-03

Voltage	85-265VAC
Material	Aluminum
Led Type	2835/5730
Beam	120°
CCT	2700K-7000K
Ra	80
Pf	>0.5
IP	65

10W Lumen 800-900LM

20W Lumen 1600-1700LM

30W Lumen 2400-2500LM

200W Lumen 18000-18200LM

50W Lumen 4000-4100LM

100W Lumen 8000-8100LM

150W Lumen 12000-12200LM



WM-FL-04

Voltage	85-265VAC
Material	Aluminum
Led Type	2835/5730
Beam	120°
CCT	2700K-7000K
Ra	80
Pf	>0.5
IP	65

- 10W — Lumen 800-900LM
- 20W — Lumen 1600-1700LM
- 30W — Lumen 2400-2500LM
- 50W — Lumen 4000-4100LM
- 100W — Lumen 8000-8100LM
- 150W — Lumen 12000-12200LM
- 200W — Lumen 18000-18200LM



WM-FL-05

Voltage	85-265VAC
Material	Aluminum
Led Type	2835/5730
Beam	120°
CCT	2700K-7000K
Ra	80
Pf	>0.5
IP	65

- 10W — Lumen 800-900LM
- 30W — Lumen 2400-2500LM
- 50W — Lumen 4000-4100LM
- 100W — Lumen 8000-8100LM
- 150W — Lumen 12000-12200LM
- 200W — Lumen 18000-18200LM

LED LIGHT FLOODLIGHT



WM-FL-06

Voltage	85-265VAC
Material	Aluminum
Led Type	COB
Beam	120°
CCT	2700K-7000K
Ra	80
Pf	>0.5
IP	65

10W	20W	30W	50W	200W	70W	100W	120W	150W
Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen	Lumen
800-900LM	1600-1800LM	2400-2700LM	4000-4500LM	16000-18000LM	5600-6300LM	8000-9000LM	9600-10800LM	12000-13500LM



Specification

10w/20w/30W/50W
portable & rechargeable emergency
LEDfloodlight

body material	Aluminum alloy
operating voltage	AC220-240V DC8.4V
LED CHIP	Epistar/Bridgelux
Lumen	80-90LM/W
Working time	8-10hrs
IP Rating	IP65
Certification	CE/RoHS



Color Temperature

Red,Green,bule,RGB,VIOLET,
2700K~7000K

Working Frequency	50-60Hz
Power Factor	0.9
Beam Angle	120 degree
LED Life Span	50000h



LED PANEL LIGHT



WM-PR-01

Voltage	85-265V/AC
Material	Aluminum
Led Type	2835
CCT	2700K-7000K
Ra	80
Pf	>0.5

3W
Lumen
130-150LM
Dimmension
88*75MM

6W
Lumen
340-360LM
Dimmension
120*110MM

9W
Lumen
550-580LM
Dimmension
150*135MM

12W
Lumen
750-780LM
Dimmension
170*155MM

15W
Lumen
1100-1150LM
Dimmension
Φ190*175MM

18W
Lumen
1300-1400LM
Dimmension
Φ225*205MM

24W
Lumen
1600-1700LM
Dimmension
Φ300*285MM



WM-PS-02

Voltage	85-265V/AC
Material	Aluminum
Led Type	2835
CCT	2700K-7000K
Ra	80
Pf	>0.5

3W
Lumen
130-150LM
Dimmension
88*75MM

6W
Lumen
340-360LM
Dimmension
120*110MM

9W
Lumen
550-580LM
Dimmension
150*135MM

12W
Lumen
750-780LM
Dimmension
170*155MM

15W
Lumen
1100-1150LM
Dimmension
Φ190*175MM

18W
Lumen
1300-1400LM
Dimmension
Φ225*205MM

24W
Lumen
1600-1700LM
Dimmension
Φ300*285MM

WM-PS-03

Voltage	85-265V/AV
Material	Aluminum
Led Type	2835
CCT	2700K-7000K
Ra	80
Pf	>0.5
Dimmension	595*595*8.5mm

36W Lumen 3200-3600LM

40W Lumen 3600-4000LM

48W Lumen 4300-4800LM

60W Lumen 5400-5700LM



WM-PR06/PS-04

Voltage	85-265VAC
Material	Aluminum&PC
Led Type	2835
Beam	120°
CCT	2700K-7000K
Ra	80
Pf	>0.5
IP	20

6W Lumen 450-480LM

12W Lumen 900-960LM

18W Lumen 1300-1400LM

24W Lumen 1800-1900LM



WM-PR-05

Voltage	85-265V/AV
Material	Aluminum
Led Type	2835
CCT	2700K-7000K
Ra	80
Pf	>0.5

6W Lumen 340-370LM

12W Lumen 750-780LM

18W Lumen 1300-1400LM

24W Lumen 1600-1700LM



WM-PS-06

Voltage	85-265V/AV
Material	Aluminum
Led Type	2835
CCT	2700K-7000K
Ra	80
Pf	>0.5

6W Lumen 340-370LM

12W Lumen 750-780LM

18W Lumen 1300-1400LM

24W Lumen 1600-1700LM



LED DOWNLIGHT


Voltage	85-265V/AV
Material	Aluminum
Led Type	2835
CCT	2700K-7000K
Ra	80
Pf	>0.5

5W Lumen 400-430LM

9W Lumen 720-750LM

15W Lumen 1200-1250LM

21W Lumen 1600-1700LM

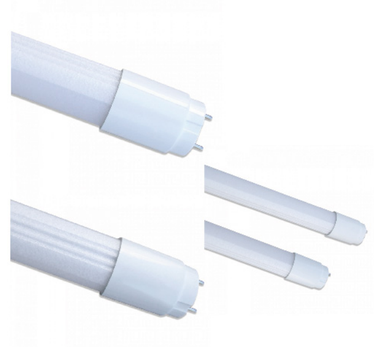

T8 NANO TUBE

Voltage	85-265V/AV
Material	Nano PC&Aluminum
Led Type	2835
CCT	2700K-7000K
Ra	80
Pf	>0.5

9W Lumen 800-900LM Dimmension Φ30*L600MM

14W Lumen 1300-1400LM Dimmension Φ30*L900MM

18W Lumen 1700-1800LM Dimmension Φ30*L1200MM

24W Lumen 2300-2400LM Dimmension Φ30*L1500MM



T8 PLASTIC TUBE

Voltage	85-265V/AV
Lumen	90-100LM/W
Material	PC&Aluminum
Led Type	2835
CCT	2700K-7000K
Ra	80
Pf	>0.5

9W Lumen 800-900LM Dimmension Φ30*L600MM

14W Lumen 1300-1400LM Dimmension Φ30*L900MM

18W Lumen 1700-1800LM Dimmension Φ30*L1200MM

24W Lumen 2300-2400LM Dimmension Φ30*L1500MM



LED PURIFICATION LAMP

Voltage	170-265VAC
Material	Aluminum&PC
Led Type	2835/5630
Beam	120°
CCT	2700K-7000K
Ra	80
Pf	>0.5
IP	20

10W Lumen 800-900LM Size 30cm


20W Lumen 1600-1700LM Size 60cm

30W Lumen 2400-2500LM Size 90cm

40W Lumen 3200-3300LM Size 120cm

50W Lumen 4000-4100LM Size 150cm

80W Lumen 6400-6500LM Size 240cm

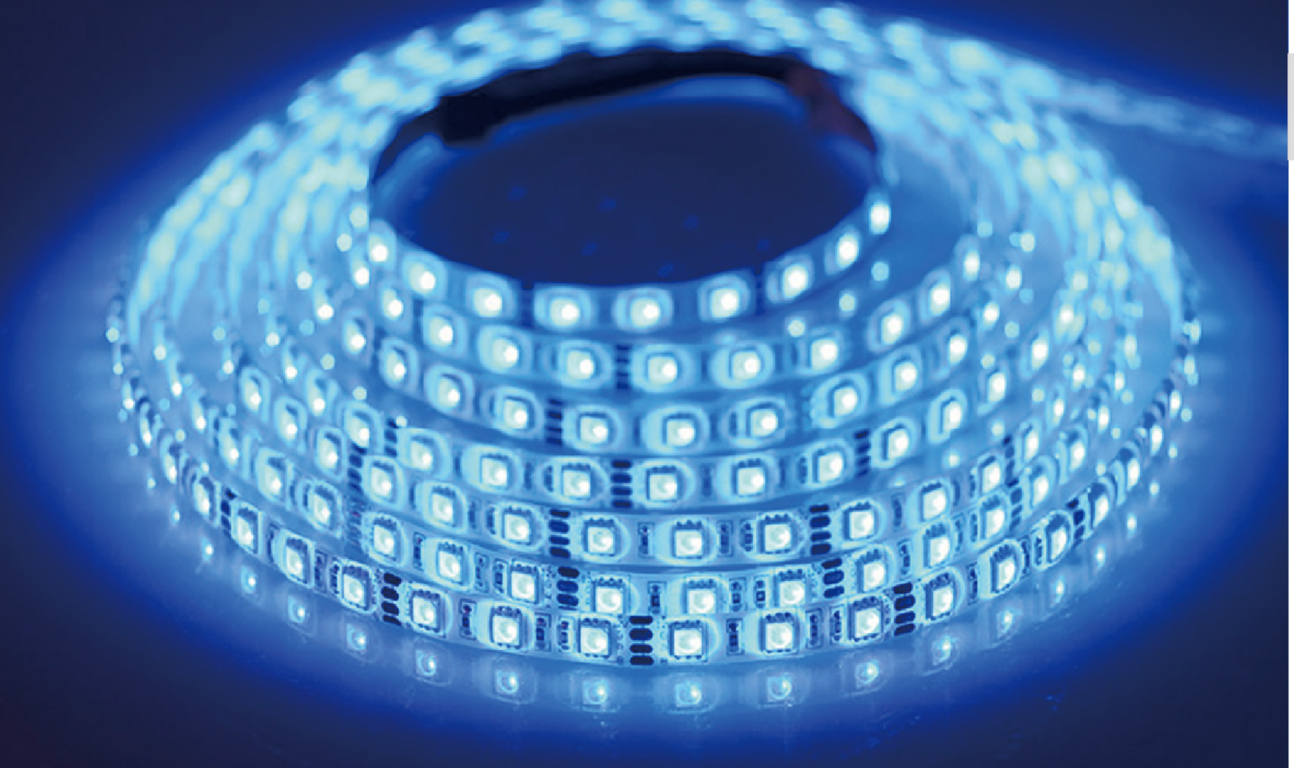

LED STRIP LIGHT



SMD3528

PCB SIZE	5000*8MM
PCB COLOR	YELLOW/WHITE
VOLTAGE	DC12V/DC24V
WATERPROOR	IP20/IP65
PACKAGE	5M/ROLL


LED QTY 30SMD/M	WATTAGE 2.4W/M
LED QTY 60SMD/M	WATTAGE 4.8W/M
LED QTY 120SMD/M	WATTAGE 9.6W/M



SMD5050

PCB SIZE	5000*8MM
PCB COLOR	YELLOW/WHITE
VOLTAGE	DC12V/DC24V
WATERPROOR	IP20/IP65
PACKAGE	5M/ROLL

LED QTY 30SMD/M	WATTAGE 7.2W/M
LED QTY 60SMD/M	WATTAGE 14.4W/M
LED QTY 120SMD/M	WATTAGE 28.8W/M

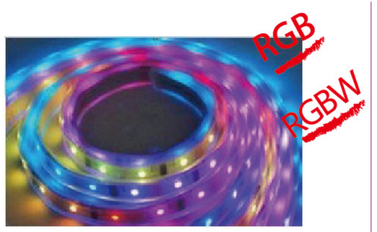

SMD5050

PCB SIZE	5000*8MM
PCB COLOR	YELLOW/WHITE
VOLTAGE	DC12V/DC24V
WATERPROOR	IP20/IP65
PACKAGE	5M/ROLL

LED QTY 30SMD/M	WATTAGE 7.2W/M
LED QTY 60SMD/M	WATTAGE 14.4W/M
LED QTY 120SMD/M	WATTAGE 28.8W/M



SMD2835

PCB SIZE	5000*8MM
PCB COLOR	YELLOW/WHITE
VOLTAGE	DC12V/DC24V
WATERPROOR	IP20/IP65
PACKAGE	5M/ROLL

LED QTY 30SMD/M	WATTAGE 2.4W/M
LED QTY 60SMD/M	WATTAGE 4.8W/M
LED QTY 120SMD/M	WATTAGE 9.6W/M



WM-LS5050-60-220

Power	14.40W/Mt
Voltage	220-240VAC
Led Type	5050
Led Quantity	60
IP	65
Roll/Mt	50
Size	15mmx7mm

1	Lumen 1080Lm/Mt	CCT 6000K
2	Lumen 1000Lm/Mt	CCT 4000K
3	Lumen 970Lm/Mt	CCT 3000K
4	Lumen RGB	CCT RGB



WM-LS5050-60-220

Power	14.40W/Mt
Voltage	220-240VAC
Led Type	5050
Led Quantity	60
IP	65
Roll/Mt	50
Size	15mmx7mm

1	Lumen 1080Lm/Mt	CCT 6000K
2	Lumen 1000Lm/Mt	CCT 4000K
3	Lumen 970Lm/Mt	CCT 3000K
4	Lumen RGB	CCT RGB


LED LIGHT LED STRIP LIGHT



WM-LS2835-60-220

Power	4.40W/M
Voltage	220-240VAC
Led Type	2835
Led Quantity	60
IP	65
Roll/Mt	50
Size	13.6*4mm

1	Lumen 1300Lm/Mt	CCT 6000K
2	Lumen 1200Lm/Mt	CCT 4000K
3	Lumen 1100Lm/Mt	CCT 3000K




WM-LS2835-120-220

Power	9.6W/M
Voltage	220-240VAC
Led Type	2835
Led Quantity	120
IP	65
Roll/Mt	50
Size	14.0*7mm

1	Lumen 2400Lm/Mt	CCT 6000K
2	Lumen 2300Lm/Mt	CCT 4000K
3	Lumen 2200Lm/Mt	CCT 3000K



TRI-PROOF LIGHT

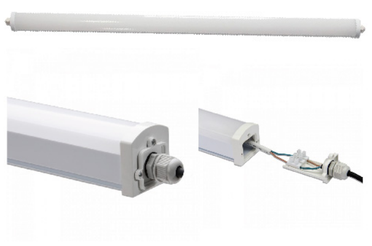

WM-TAL-1

Voltage	85-265VAC
Material	PC
Led Type	2835
Beam	120°
CCT	2700K-7000K
IP	65
Ra	80
Pf	>0.5
IK	10

18W	36W	45W
Lumen 1600-1650LM	Lumen 3200-3300LM	Lumen 4000-4100LM
Size 600mm	Size 1200mm	Size 1500mm



WM-T8F-2

Material	ABS+POLICARBONATO
IP	65
IK	07

Length 600mm	Size 662mmx86mmx90mm
Length 900mm	Size 912mmx124mmx90mm
Length 1200mm	Size 1262mmx124mmx90mm
Length 1500mm	Size 1565mmx124mmx90mm



WM-T8F-3

Material	ABS+POLICARBONATO
IP	65
IK	07

Length 600mm	Size 662mmx86mmx90mm
Length 900mm	Size 912mmx124mmx90mm
Length 1200mm	Size 1262mmx124mmx90mm
Length 1200mm	Size 1565mmx124mmx90mm



WM-TAL-4

Material	PC+POLICARBONATO
CCT	2700K-7000K
Ra	>80
IK	07

20W	Length 600mm	Lumen 1800lm	Size 665mmx82mmx80mm
40W	Length 1200mm	Lumen 3600lm	Size 1265mmx82mmx80mm
46W	Length 4200mm	Lumen 7200lm	Size 1565mmx82mmx80mm



LED BULB



WM-A60-1

Voltage	170-265VAC
Material	Plastic&Aluminum
Led Type	2835
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ60*H106MM

- 6W — Lumen 550-600LM
- 8W — Lumen 720-800LM
- 10W — Lumen 900-1000LM
- 12W — Lumen 1000-1100LM



WM-A60-2

Voltage	170-265VAC
Material	Plastic&Aluminum
Led Type	2835
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ60*H120MM

- 6W — Lumen 550-600LM
- 8W — Lumen 720-800LM
- 10W — Lumen 900-1000LM
- 12W — Lumen 1000-1100LM
- 15W — Lumen 1300-1400LM



WM-A70-3

Voltage	170-265VAC
Material	Plastic&Aluminum
Led Type	2835/5630
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ70*H135MM

15W
Lumen
1300-1400LM

18W
Lumen
1500-1600LM



WM-G90/120-5

Voltage	220-240VAC
Material	Plastic&Aluminum
Led Type	2835/5630
Base	E27
CCT	2700K-7000K
Pa	80
Pf	>0.5

12W
G95
Lumen
1000-1100LM
Size
Φ95*H136MM

15W
G120
Lumen
1200-1300LM
Size
Φ120*H180MM

18W
G120
Lumen
1500-1600LM
Size
Φ120*H180MM



M-G95/120-4

Voltage	220-240VAC
Material	Aluminum
Led Type	2835/5630
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5

15W
G95
Lumen
1200-1300LM
Size
Φ95*H136MM

18W
G120
Lumen
1400-1500LM
Size
Φ120*H180MM



WM-G45-6

Voltage	220-240VAC
Material	Plastic&Aluminum
Led Type	2835
Base	E27/E14
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ45*H80MM

4W
Lumen
320-350LM

5W
Lumen
420-450LM

6W
Lumen
500-550LM

7W
Lumen
600-630LM



WM-C37-7

Voltage	220-240VAC
Material	Plastic&Aluminum
Led Type	2835
Base	E27/E14
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ37*H108MM

4W Lumen 320-350LM

5W Lumen 420-450LM

6W Lumen 500-550LM

7W Lumen 600-630LM



WM-C37-8

Voltage	220-240VAC
Material	Plastic&Aluminum
Led Type	2835
Base	E27/E14
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ37*H108MM

4W Lumen 320-350LM

5W Lumen 420-450LM

6W Lumen 500-550LM

7W Lumen 600-630LM



WM-G45-9

Voltage	220-240VAC
Material	Plastic&Aluminum/Ceramic
Led Type	2835
Base	E27/E14
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ45*H80MM

4W Lumen 320-350LM

5W Lumen 420-450LM

6W Lumen 550-600LM

7W Lumen 600-630LM



WM-G45-10

Voltage	220-240VAC
Material	Plastic&Aluminum
Led Type	2835
Base	E27/E14
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ45*H80MM

4W Lumen 320-350LM

5W Lumen 420-450LM

6W Lumen 550-600LM

7W Lumen 600-630LM





WM-RS-11

Voltage	220-240VAC
Material	Plastic&Aluminum
Led Type	2835
Base	E27/E14
CCT	2700K-7000K
Ra	80
Pf	>0.5

4W
R39
Lumen
320-350LM
Size
Φ39*H70MM

5W
R50
Lumen
420-450LM
Size
Φ50*H93MM

6W
R63
Lumen
620-680LM
Size
Φ63*H106MM

8W
R63
Lumen
640-720LM
Size
Φ63*H105MM

10W
R63
Lumen
800-830LM
Size
Φ63*H105MM

12W
R80
Lumen
1000-1100LM
Size
Φ80*H110MM



WM-CLD-12

Voltage	170-265VAC
Material	Aluminum&PA mixed
Led Type	2835
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5

15W
Lumen
1200-1350LM
Size
Φ130*90MM

20W
Lumen
1600-1800LM
Size
Φ160*100MM

25W
Lumen
1950-2150LM
Size
Φ190*110MM



WM-BL-13

Voltage	170-265VAC
Material	Aluminum
Led Type	2835
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5

20W
Lumen
1700-1800LM
Size
Φ80*145MM

30W
Lumen
2600-2700LM
Size
Φ100*180MM

40W
Lumen
3500-3600LM
Size
Φ120*210MM

50W
Lumen
4400-4500LM
Size
Φ140*230MM

60W
Lumen
5000-5500LM
Size
Φ140*230MM



WM-FG45-14

Voltage	220-240VAC
Material	GLASS
Led Type	blue diamond/ceramic
Base	E27/E14
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ45*H70MM

2W	4W	6W
Lumen 180-200LM	Lumen 380-450LM	Lumen 500-550LM



WM-FA60-15

Voltage	220-240VAC
Material	GLASS
Led Type	blue diamond/ceramic
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ60*H100MM

4W	6W	8W
Lumen 380-450LM	Lumen 570-650LM	Lumen 750-850LM



SPOT LIGHT



WM-SP-COB-01

Voltage	220-240VAC
Material	Aluminum
Led Type	COB
Base	GU10/MR16
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	50*55MM

5W	7W
Lumen 420-450LM	Lumen 620-680LM



WM-SP-02

Voltage	12V/230V
Material	Aluminum&Plastic
View angle	120
Led Type	2835
Base	GU10/GU5.3
CCT	WW/NW/CW
Ra	80
Pf	>0.5
Size	50*55MM

3W Lumen 210-250LM

4W Lumen 300-350LM

5W Lumen 380-450LM

6W Lumen 450-480LM

7W Lumen 480-560LM



WM-SP-03

Voltage	12V/230V
Material	Aluminum&Plastic
Led Type	2835
Base	E27/E14/GU10/GU5.3
CCT	WW/NW/CW
Ra	80
Pf	>0.5
Size	Φ50*55/50*75MM

3W Lumen 210-250LM

4W Lumen 300-350LM

5W Lumen 380-450LM

6W Lumen 450-480LM

7W Lumen 480-560LM



WM-SP-04

Voltage	12V/230V
Material	Aluminum
View angle	120
Led Type	2835/3528/5050
Base	E27/E14/GU10/GU5.3
CCT	WW/NW/CW
Ra	80
Pf	>0.5

3W Lumen 280-300LM Size 50*55MM

3.5W Lumen 240-260LM Size Φ50*75MM

4W Lumen 320-350LM Size Φ50*75MM

5W Lumen 400-450LM Size Φ50*75MM



WM-SP-05

Voltage	12V/230V
Material	Glass
View angle	120
Led Type	2835/3528/5050
Base	E27/E14/GU10/GU5.3
CCT	WW/NW/CW
Ra	80
Pf	>0.5

3W Lumen 240-260LM Size Φ50*55MM

4W Lumen 320-350LM Size Φ50*75MM

5W Lumen 400-450LM Size Φ50*75MM



WM-SP-06

Voltage	220-240VAC
Material	Plastic&Aluminum
Led Type	2835
Base	GU10/MR16
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	50*55MM

5W	6W	7W
Lumen 420-450LM	Lumen 550-600LM	Lumen 560-630LM



WM-SPC-07

Voltage	12V/230V
Material	Aluminum
View angle	60/90/120
Led Type	COB
Base	GU10/GU5.3
CCT	WW/NW/CW
Ra	80
Pf	>0.5
Size	50*65MM

5W	7W
Lumen 420-450LM	Lumen 560-630LM



WM-SP-08

Voltage	12V/230V
Material	Aluminum
View angle	60/120
Led Type	COB
Base	GU10/GU5.3
CCT	WW/NW/CW
Ra	80
Pf	>0.5

5W	7W
Lumen 420-450LM Size 50*55MM	Lumen 560-630LM Size 50*70MM



WM-SP-09

Voltage	220-240VAC
Material	Plastic&Aluminum
Led Type	2835
Base	GU10/MR16
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	50*H55MM

5W	7W
Lumen 420-450LM	Lumen 560-630LM



WM-SP-COB-10

Voltage	220-240VAC
Material	Plastic&Aluminum
Led Type	COB
Base	GU10/MR16
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	50*H55MM

5W

Lumen
420-450LM

7W

Lumen
560-630LM



WM-CB

Voltage	170-265VAC
Material	Aluminum+PA mixed
Led Source	2835
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5

36W

Lumen
3100-3300LM
Size
Φ87*235MM

50W

Lumen
4500-4800LM
Size
Φ93*290MM

80W

Lumen
7200-7800LM
Size
Φ121*306MM



WM-SPC-11

Voltage	220-240VAC
Material	Ceramic
Base	GU10
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ50*H58MM

9W

Lumen
780-810LM



WM-PAR-COB

Voltage	176-265VAC
Material	Plastic&PC
Led Source	COB
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5
Beam Angle	12°/24°/36°

8W

PAR20
Lumen
580-680LM
Size
Φ63*83MM

14W

PAR30
Lumen
1100-1150LM
Size
Φ92*125MM

20W

PAR38
Lumen
1500-1650LM
Size
Φ120*130MM



WM-PAR-SMD

Voltage	170-265VAC
Material	Aluminum&PC
Led Source	SMD
Base	E27
CCT	2700K-7000K
Ra	80
Pf	>0.5
Beam Angle	15°/24°/36°

8W	12W	18W
PAR20	PAR30	PAR38
Lumen	Lumen	Lumen
580-680LM	1000-1100LM	1600-1700LM
Size	Size	Size
Φ63*83MM	Φ92*125MM	Φ120*130MM



WM-AR111-COB

Voltage	170-265VAC
Material	PC&Aluminum
Led Type	COB
Base	GU10/AR111
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ111*69MM
Beam Angle	12°/24°/36°

12W	15W
Lumen	Lumen
950-1000LM	1100-1200LM



WM-AR111-SMD

Voltage	170-265VAC
Material	PC&Aluminum
Led Type	SMD
Base	GU10/AR111
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ111*69MM
Beam Angle	36°

12W	15W
Lumen	Lumen
1000-1050LM	1200-1300LM



WM-PL2835

Voltage	90-260V/AV
Material	Aluminum+PC
Led Type	2835/5050/5630
Beam	E27/G23/G24
CCT	2700K-7000K
Ra	80
Pf	>0.5
Size	Φ35*H124MM

6W	8W	10W	12W
Lumen	Lumen	Lumen	Lumen
510-540LM	690-720LM	870-900LM	1050-1080LM



WM-R7S

Voltage	90-260V/AV
Material	Aluminum
Led Type	2835/5050/5630/3014
Beam	E27/G23/G24
CCT	2700K-7000K
Ra	80
Pf	>0.5

5W Lumen 400-450LM Size Φ31*H78MM

8W Lumen 640-720LM Size Φ31*H118MM

10W Lumen 870-900LM Size Φ31*H118MM

12W Lumen 1050-1080LM Size Φ31*H135MM

15W Lumen 1280-1440LM Size Φ31*H189MM



WM-R7S-SLIM

Voltage	85-265V/AV
Material	Aluminum&PC
Led Type	2835
Beam	E27/G23/G24
CCT	2700K-7000K
Ra	80
Pf	>0.5

5W Lumen 450-500LM Size Φ22*78MM

10W Lumen 900-1000LM Size Φ22*118MM

15W Lumen 1350-1500LM Size Φ35*H135MM

18W Lumen 1700-1800LM Size Φ22*H189MM



LED LIGHT NAIL LAMP



WM-UV-NAIL-1



WM-UV-NAIL-2



WM-UV-NAIL-3



WM-UV-NAIL-4



WM-UV-NAIL-5



WM-UV-NAIL-6

UV LED Nail Lamp

Voltage	100-240VAC
Material	Aluminum&Plastic
Body Color	As Your Request
Time	10S 30S 60S

9W 18W 36W 48W 54W













WM-LEDLASER-01

Voltage	110-240VAC
Material	Aluminum
IP	65
Color Output	Red, Green, Blue

COLORFUL SNOW










LED LIGHT LASER LIGHT



WM-LEDLASER-02

Voltage	110-240VAC
Material	Aluminum
IP	65
Color Output	Red, Green, Blue

STATIC STARRINESS










wellmade




WM-LEDLASER-03

Voltage	110-240VAC
Material	Aluminum
IP	65
Color Output	Red, Green, Blue

DYNAMIC STARRINESS

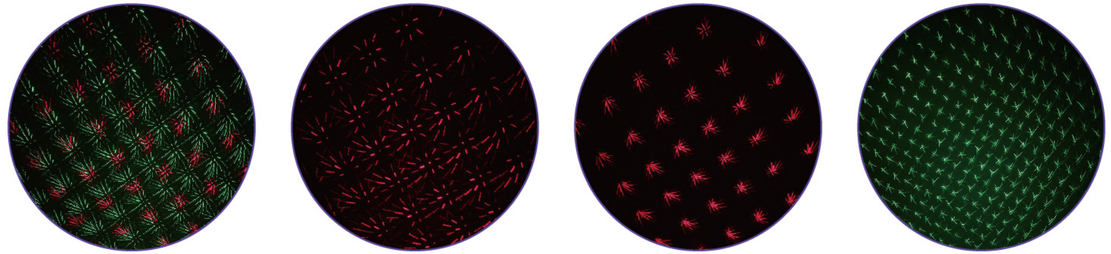



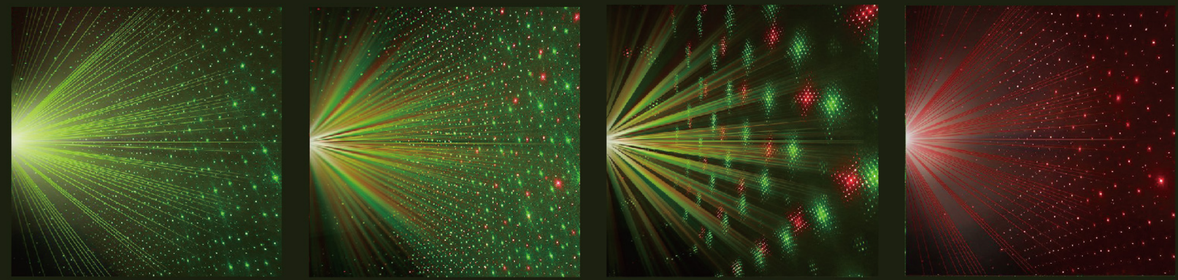



DOWNLIGHT FIXTURE



WM-34Z16



WM-23Z16



WM-009A16



WM-005A16




WM-004A16



WM-008A16



WM-S003A16



WM-S001A16



WM-662



WM-2BZ16



WM-661



WM-296Z16




WM-182A16



WM-63Z16




WM-1816X53




WM-172A16




WM-69Z16



WM-181A16



WM-S001A16

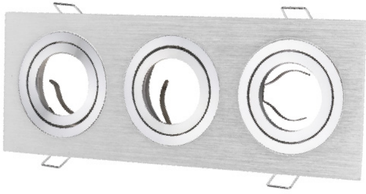

WM-182-3A16